
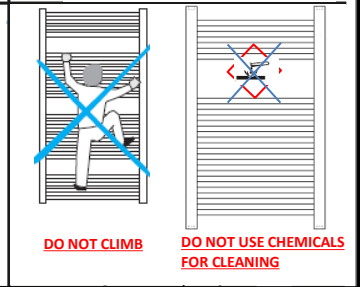



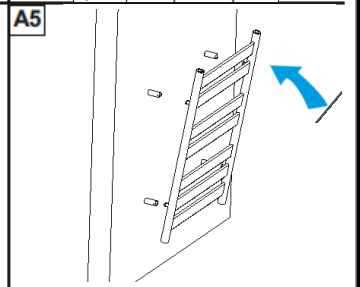



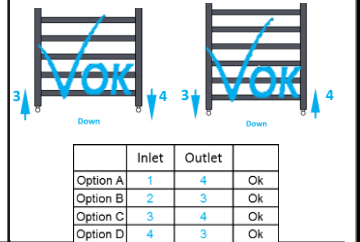


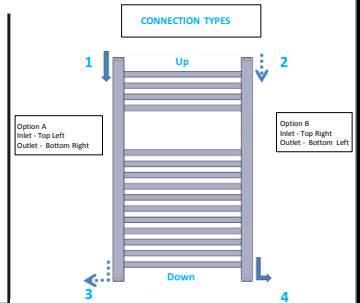


# TYPE ART-42

- Ⓓ Montageanleitung
- ⒼⒸ Assembly Instructions
- Ⓕ Instructions de montage
- Ⓘ Istruzioni di montaggio
- Ⓔ Instrucciones de montaje
- Ⓗ Szerelési utasítás
- Ⓝ Montageaanwijzing
- © Copyright by PMA 01/15



- If a colored radiator is dirty due to transport, warehousing or installation, the surface of the radiator should be cleaned with cold or luke warm water. For persistent marks, a neutral or low alkaline cleaner can be used.
- Further cleaning can be achieved by using soft, non-abrasive cloths or rags.
- The surface temperature of the radiator must not be higher than 25 °C during the cleaning process.
- The maximum temperature for the detergent is 25 °C. Do not use steam jet appliances.
- Do not use scraping or abrasive devices. Only use soft cloths for cleaning. Vigorous rubbing is to be avoided.
- Do not use acid or alkaline detergents or wetting agents.
- Do not use organic dissolving agents containing ester, ketone, alcohol, aromatics, glycol ether, halogenated hydrocarbons or other similar products.
- Do not use detergents with unknown compounds.
- Rinse with clear, cold water immediately after cleaning.

L	H	N	L1	H1
500	800	460	460	600
500	1000	460	460	800
500	1180	460	460	1000
500	1400	460	460	1240
500	1600	460	460	1440

