

**zehnder**

always the  
best climate

# Zehnder Fina Bar

Product data sheet



A new level of purism: With its flat, minimalist design, Zehnder Fina Bar blends into any modern bathroom. Available in almost any colour and finish from the Zehnder colour chart. The radiant heat from the large heating surface provides comfortable warmth in no time. The design is complemented by the linear towel rail, which keeps towels beautifully warm at all times.

## Benefits

- Uncomplicated construction provides an understated design
- Self-adjusting side covers facilitate a closed design that can be adapted to different wall clearances
- Smooth surface makes for easy cleaning
- The height-adjustable chrome towel rail is particularly convenient for hanging towels
- Additional towel rails are optionally available to conveniently provide more space for hanging towels
- Compatible with a heat pump and/or low-temperature systems
- Short response time means rooms can be heated up rapidly
- The polymer heating register increases thermal output by 30%, while its weight is reduced by 25%


## Special benefits for hot water operation

- Flexibly positioned connections make it easy to install as required

## Special benefits for electric operation

- User-friendly control device allows simple operation
- Diverse adjustment options: Regulated room temperature or operation in energy-saving or frost-protection mode
- Comes ready-to-plug for easy and quick installation
- The electric radiator provides warm towels and rooms all the year round
- Energy-efficient and comfortable heating with innovative “open window detection”
- Electric operation provides warm towels and comfortable rooms all year round
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W in stand-by mode for increased energy efficiency
- Customisable daily and weekly programmes for convenient, on-demand operation
- Increased safety with keylock
- Flexible control options: control device for wall mounting or base
- Timer function for on-demand operation
- Aesthetically appealing design due to concealed electric heating element

## Model overview

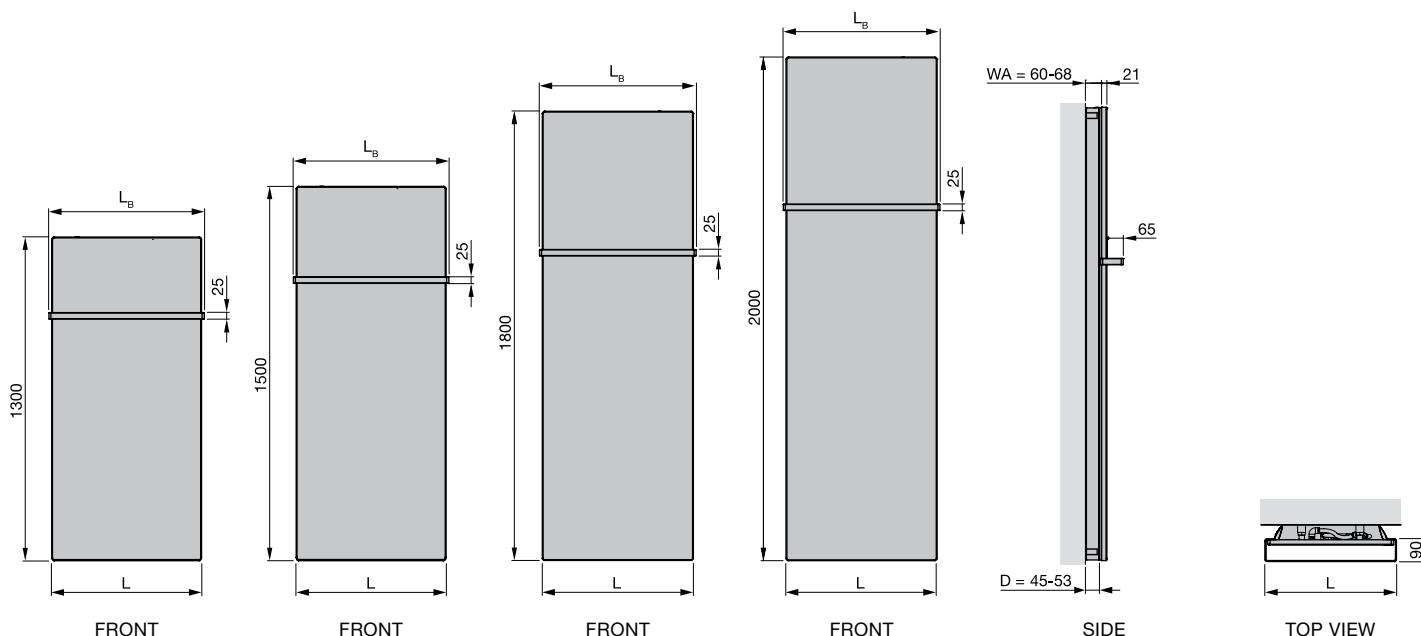

L = length  
 L<sub>B</sub> = towel rail length  
 D = distance from wall to middle of connection  
 WA = wall clearance

Dimensions in mm

## Connection to hot water central heating system

Painted version


Model	H mm	L mm	L <sub>B</sub> mm	Thermal output			
				75/65/20 °C <sup>1)</sup> Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt
<b>FIP-130-050</b>	1300	500	522	735	522	312	376
<b>FIP-150-050</b>	1500	500	522	833	594	358	430
<b>FIP-180-050</b>	1800	500	522	962	691	420	503
<b>FIP-130-060</b>	1300	600	622	882	626	374	452
<b>FIP-150-060</b>	1500	600	622	999	712	429	516
<b>FIP-180-060</b>	1800	600	622	1154	828	503	604
<b>FIP-130-070</b>	1300	700	722	1029	731	437	527
<b>FIP-150-070</b>	1500	700	722	1166	832	500	602
<b>FIP-180-070</b>	1800	700	722	1347	967	588	705

## Electric-only operation


Painted version

Model	H mm	L mm	L <sub>B</sub> mm	Output electric Watt
<b>FIPE-130-050/GP</b>	1300	500	522	450
<b>FIPE-150-050/GP</b>	1500	500	522	550
<b>FIPE-180-050/GP</b>	1800	500	522	650
<b>FIPE-180-060/GP</b>	1800	600	622	750
<b>FIPE-180-070/GP</b>	1800	700	722	1000

## Product details

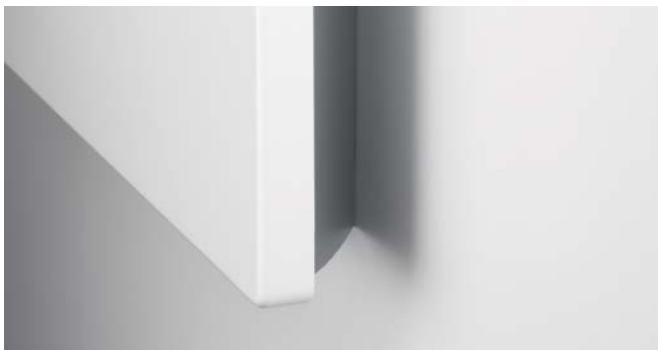

Side covers extend to the wall.

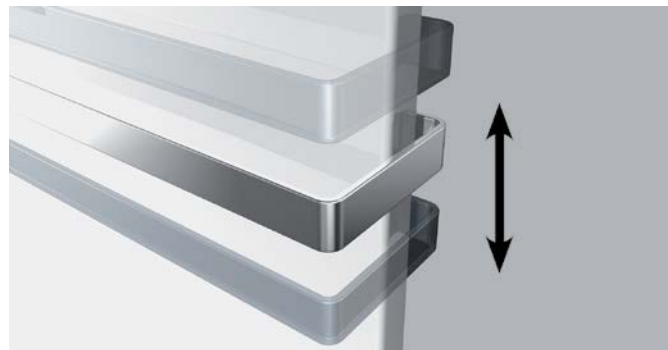


Towel rail is easy to adjust and can be positioned at any height.

H = height, L = length, L<sub>B</sub> = towel rail length

1) Nominal heat output according to EN 442

# Zehnder Fina Bar

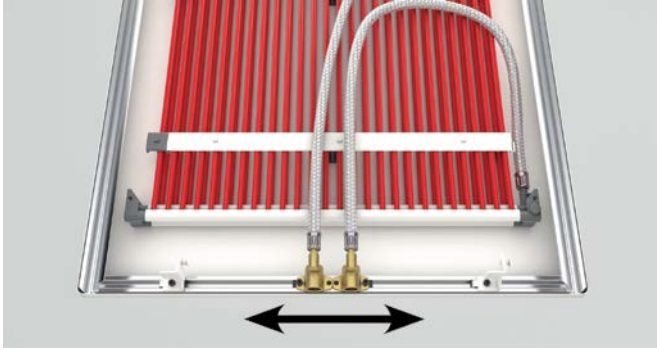

The flexible Zehnder EasyTube connections – perfect for refurbishments, too.

V20180913, RAD\_DAS, SI\_en, subject to change without notice