

**zehnder**

always the  
best climate

# Zehnder Nobis

Product data sheet



Zehnder Nobis and its high quality chrome finished tubes bring a special look to every bathroom. The large spacing between the tubes combines distinctive character with functionality. Several towels can be heated at the same time.

## Benefits

- Distinctive design ideally blends with classic bathrooms
- Elegant design in high-quality chrome
- Ample spaces between tubes are convenient for hanging towels
- Corrosion-resistant materials also make it suitable for use with open heating systems


## Special benefits for hot water operation

- Flexible installation due to 50mm centre connections
- Matching designer adjustment dial available on request

## Special benefits for electric operation

- Demand-controlled temperature provided by three radiator temperature levels to choose from
- Timer function for on-demand operation
- Dry-running protection prevents temperature warning
- Comes ready-to-plug for easy and quick installation
- The electric radiator provides warm towels and rooms all the year round
- Electric operation provides warm towels and comfortable rooms all year round
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W in stand-by mode for increased energy efficiency
- User-friendly control device allows simple operation
- Customisable daily and weekly programmes for convenient, on-demand operation
- Increased safety with keylock

## Model overview

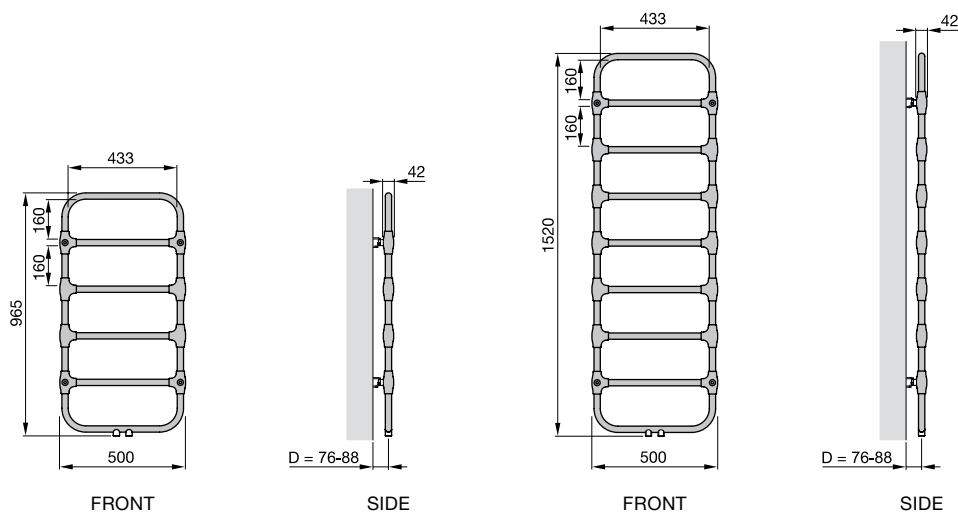

D = distance from wall to middle of connection

Dimensions in mm

# Zehnder Nobis

## Connection to hot water central heating and open heating system

Chrome-plated version

Model	H mm	L mm	Thermal output			
			75/65/20 °C <sup>1)</sup> Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt
<b>NOB-100-050</b>	965	500	185	132	80	96.2
<b>NOB-150-050</b>	1520	500	288	205	123	148

## Electric-only operation


Chrome-plated version

Model	H mm	L mm	Output electric heating element
			Watt
<b>NOBE-100-050/DD</b>	1104	500	150

## Product types and connection options



Hot water operation version with Zehnder thermostat and Zehnder Comfort fittings in chrome.

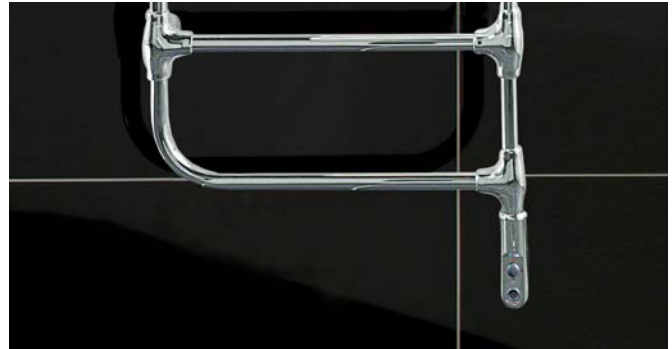

Electric operation version with integrated immersion heater DBM.



Electric operation version with integrated immersion heater WIVAR II.

H = height, L = length

1) Nominal heat output according to EN 442